



SPECIFICATIONS:

PATRIARC® Model 501-R (601-R) Curtain Tracks [Straight-Uncurved Systems]


Curtain tracks (Model 5000 (5000BL)) shall be of 7 gauge extruded aluminum I-beam construction consisting of a center rib and top, intermediate and bottom flanges. Each curtain carrier (**Model 5001-A(BL)**) shall be spaced on 12" centers and shall be of steel construction to include two nylon-tired ball-bearing wheels rolling on two separate parallel treads. Each curtain carrier shall consist of a free-moving plated swivel to accommodate curtain snap hook. Live-End (**Model 5003(BL)**) and Dead-End (**Model 5004(BL)**) pulley blocks shall be equipped with 5" diameter ball-bearing wheels adequately guarded. Operating cable (Model 5029) shall be of 3/16" diameter extruded nylon with wire-center. 1-1/4" I.D. stiffening pipe or the equivalent shall be used to support track sections. The manufacturer shall furnish two end stops (**Model 5009(BL)**) for placement at track ends. Model 501-R(601-R) as manufactured by Automatic Devices Company of Allentown, PA.

PATRIARC® Model 502 (602) Curtain Tracks [Walk-Along Track System]

Curtain tracks (Model 5000(5000BL)) shall be of 7 gauge extruded aluminum I-beam construction consisting of a center rib and top, intermediate and bottom flanges. Each curtain carrier (**Model 5001(BL)**) shall be spaced on 12" centers and shall be of steel construction to include two nylon-tired ball-bearing wheels rolling on two separate parallel treads. Each curtain carrier shall consist of a free-moving plated swivel to accommodate curtain snap hook. This model track system is for walk-along operation only and does not include pulleys or other operating hardware. 1-1/4" I.D. stiffening pipe or the equivalent shall be used to support track sections. The manufacturer shall furnish four end stops (**Model 5009(BL)**) for placement at track ends. Model 502(602) as manufactured by Automatic Devices Company of Allentown, PA.

PATRIARC® Model 502-R (602-R) Curtain Tracks [Walk-Along Track System]

Curtain tracks (Model 5000(5000BL)) shall be of 7 gauge extruded aluminum I-beam construction consisting of a center rib and top, intermediate and bottom flanges. Each curtain carrier (**Model 5001-A(BL)**) shall be spaced on 12" centers and shall be of steel construction to include two neoprene-tired ball-bearing wheels rolling on two separate parallel treads. Each curtain carrier shall consist of a free-moving plated swivel to accommodate curtain snap hook. This model track system is for walk-along operation only and does not include pulleys or other operating hardware. 1-1/4" I.D. stiffening pipe or the equivalent shall be used to support track sections. The manufacturer shall furnish four end stops (**Model 5009(BL)**) for placement at track ends. Model 502-R(602-R) as manufactured by Automatic Devices Company of Allentown, PA.

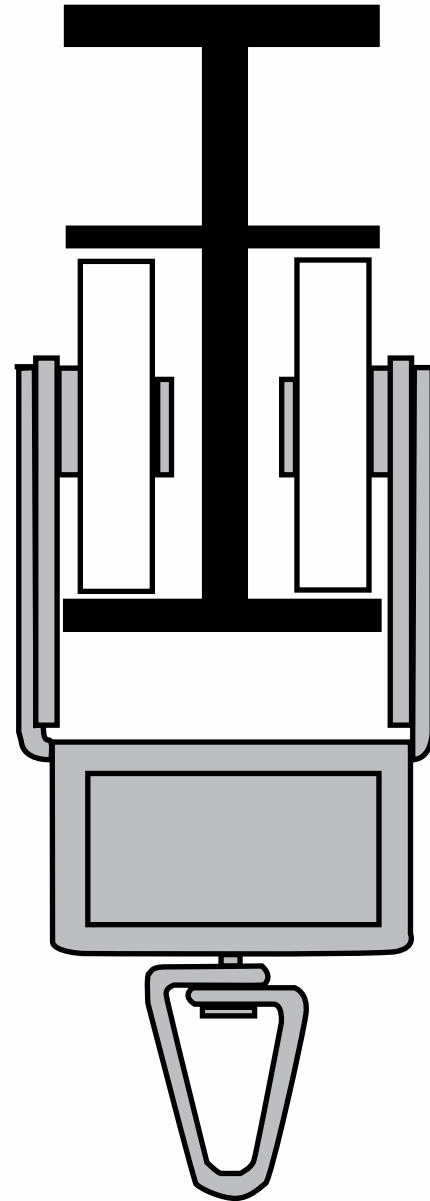

Full Size End View